


PRO TRAILER BACKUP ASSIST MEASUREMENT CARD

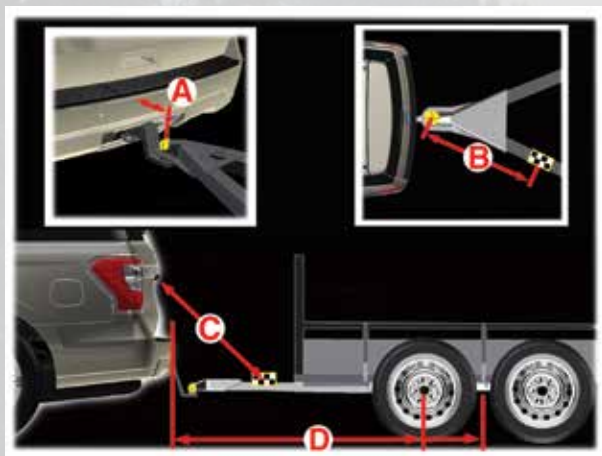

STEP 4: RECORD YOUR MEASUREMENTS

Use the space below to keep track of your measurements.

<i>Note: Round off measurements to the nearest half inch.</i>		TRAILER NAME	TRAILER NAME
A	The horizontal distance from the bumper to the center of the ball hitch on the trailer.	_____ in (cm)	_____ in (cm)
B	The horizontal distance from the center of the ball hitch to the center of the sticker.	_____ in (cm)	_____ in (cm)
C	The distance from the rear-view camera to the center of the sticker.	_____ in (cm)	_____ in (cm)
D	The horizontal distance from the bumper to the center of the trailer axle (single axle) OR the center of the trailer axles (two or more axles).	_____ in (cm)	_____ in (cm)

Return to the vehicle and use the instructions in the Quick Start Guide to enter your measurements into the information display.


Please contact your dealership if you need assistance setting up your trailer.

PRO TRAILER BACKUP ASSIST MEASUREMENT CARD

STEP 3: PLACING YOUR STICKER

PLACEMENT TIPS

- Perform sticker placement when temperatures are above 32° F (0° C)
- Clean the trailer.
- Place the sticker:
 - On a flat, dry, horizontal surface.
 - Entire sticker must be visible to the camera located in the tailgate handle.
 - Within the green zone as shown below, between 7 in (17 cm) and 22 in (55 cm) from the trailer ball hitch.
 - Lengthwise on the trailer tongue.
- Once the sticker is in place, proceed to step 4 (see other side of this card).

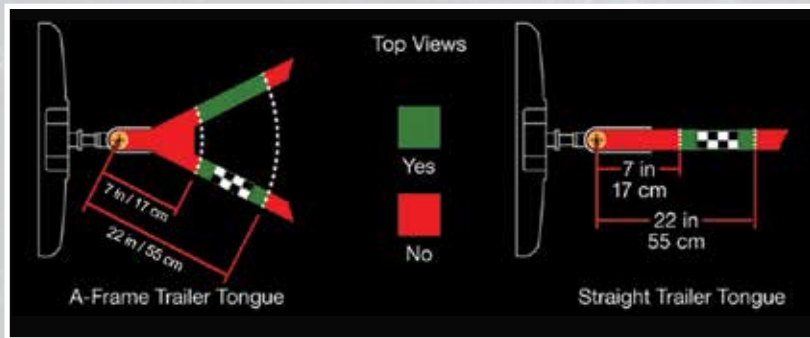

WARNING: Once placed, sticker cannot be moved. Do not attempt to re-use stickers, if removed.



[PROTRAILERBACKUPASSIST.COM/EXPEDITION](https://protrailerbackupassist.com/expedition)

Scan the QR code for instructional videos of the Pro Trailer Backup Assist set up.

