


# PRO TRAILER BACKUP ASSIST MEASUREMENT CARD

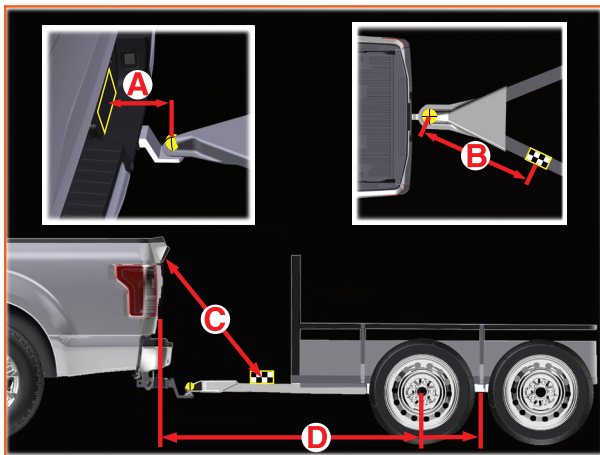

## STEP 4: RECORD YOUR MEASUREMENTS

Use the space below to keep track of your measurements.

| <i>Note: Round off measurements to the nearest half inch.</i> |                                                                                                                                                          | TRAILER NAME<br>_____ | TRAILER NAME<br>_____ |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|
| A                                                             | The horizontal distance from the license plate to the center of the ball hitch on the trailer.                                                           | _____ in (cm)         | _____ in (cm)         |
| B                                                             | The horizontal distance from the center of the ball hitch to the center of the sticker.                                                                  | _____ in (cm)         | _____ in (cm)         |
| C                                                             | The distance from the rear-view camera to the center of the sticker.                                                                                     | _____ in (cm)         | _____ in (cm)         |
| D                                                             | The horizontal distance from the tailgate to the center of the trailer axle (single axle) <b>OR</b> the center of the trailer axles (two or more axles). | _____ in (cm)         | _____ in (cm)         |

**Return to the vehicle and use the instructions in the Quick Start Guide to enter your measurements into the information display.**


Please contact your dealership if you need assistance setting up your trailer.

# PRO TRAILER BACKUP ASSIST MEASUREMENT CARD

## STEP 3: PLACING YOUR STICKER

### PLACEMENT TIPS

- Perform sticker placement when temperatures are above 32° F (0° C)
- Clean the trailer.
- Place the sticker:
  - On a flat, dry, horizontal surface.
  - Entire sticker must be visible to the camera located in the tailgate handle.
  - Within the green zone as shown below, between 7 inches (17 cm) and 22 inches (55 cm) from the trailer ball hitch.
  - Lengthwise on the trailer tongue.
- Once the sticker is in place, proceed to step 4 (see other side of this card).

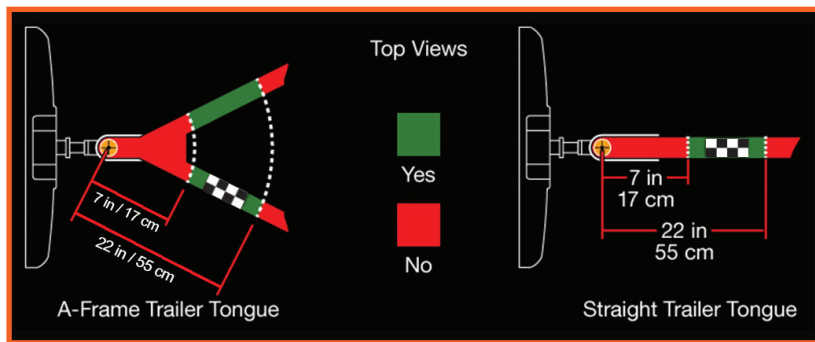

**WARNING:** Once placed, sticker cannot be moved. Do not attempt to re-use stickers, if removed.



**ProTrailerBackupAssist.com**

Scan the QR code for instructional videos of the Pro Trailer Backup Assist set up.

