


PRO TRAILER BACKUP ASSIST MEASUREMENT CARD

STEP 3: PLACING YOUR STICKER

PLACEMENT TIPS

- Perform sticker placement when temperatures are above 32° F (0° C).
- Clean the trailer.
- Place the sticker:
 - On a flat, dry, horizontal surface.
 - Entire sticker must be visible to the camera located in the tailgate handle.
 - Within the green zone as shown below, between 4 in (10 cm) and 19 in (48 cm) from the trailer ball hitch.
 - Lengthwise on the trailer tongue.

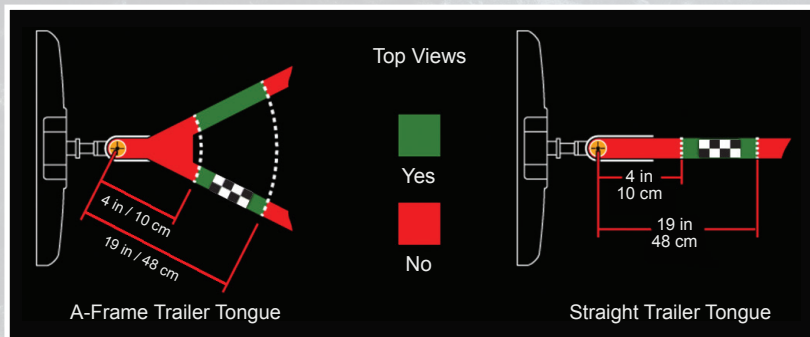

WARNING: Once placed, sticker cannot be moved. Do not attempt to re-use stickers, if removed. Please contact your dealer if you need assistance setting up your trailer.



[PROTRAILERBACKUPASSIST.COM/EXPEDITION](https://protrailerbackupassist.com/expedition)

Scan the QR code for instructional videos of the Pro Trailer Backup Assist setup.

