




# Pro Trailer Backup Assist with Trailer Reverse Guidance Measurement Card

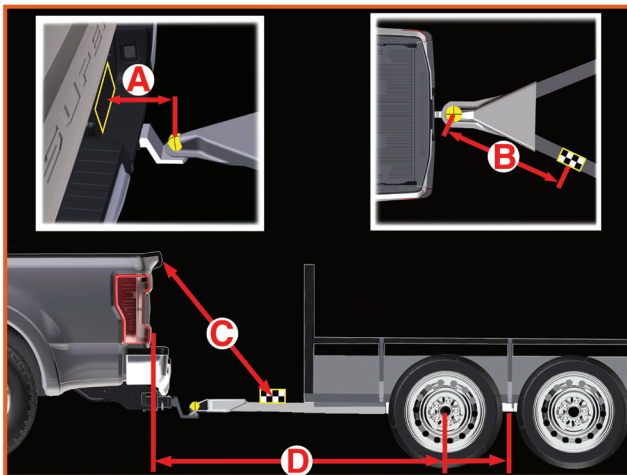

## STEP 4: Record Your Measurements

Use the space below to keep track of your measurements.

<b>Note: Round off measurements to the nearest half inch.</b>		<b>Trailer Name</b> _____	<b>Trailer Name</b> _____
<b>A</b>	The horizontal distance from the license plate to the center of the ball hitch on the trailer.	_____ in (cm)	_____ in (cm)
<b>B</b>	The horizontal distance from the center of the ball hitch to the center of the sticker.	_____ in (cm)	_____ in (cm)
<b>C</b>	The distance from the rear-view camera to the center of the sticker.	_____ in (cm)	_____ in (cm)
<b>D</b>	The horizontal distance from the tailgate to the center of the trailer axle (single axle) <b>OR</b> the center of the trailer axles (two or more axles).	_____ in (cm)	_____ in (cm)

**Return to the vehicle and use the instructions in the Quick Start Guide to enter your measurements into the information display.**




# Pro Trailer Backup Assist with Trailer Reverse Guidance Measurement Card

## STEP 3: Placing Your Sticker

### Placement Tips

- Perform sticker placement when temperatures are above 32° F (0° C)
- Clean the trailer.
- Place the sticker:
  - On a flat, dry, horizontal surface.
  - Entire sticker must be visible to the camera located in the tailgate handle.
  - Within the green zone as shown below, between 7 inches (17 cm) and 20 inches (51 cm) from the trailer ball hitch.
  - Lengthwise on the trailer tongue.
- Once the sticker is in place, proceed to step 4 (see other side of this card).

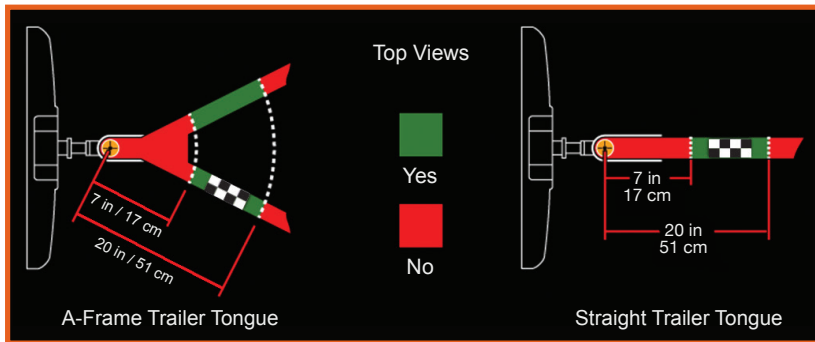

**WARNING:** Once placed, sticker cannot be moved. Do not attempt to re-use stickers, if removed.



[owner.ford.com](https://owner.ford.com) (U.S.)



[ford.ca](https://ford.ca) (Canada)

Scan the QR code for additional information about your vehicle.

